O AMP Oil Mist Lubricating Pump



SPECIFICATION TABLE:


The oil supplier operation by combining gear pump and compressed air, then to form the oil mist. Through micro oil mist which helps tp cooler lubrication and better cutting application. Meantime, to increase production speed and reduce machine & knife' wear.

0~300cc injection quantity can be adjustment according the requirement. To combine eith oil infection nozzle can also can control the air oil content.

FUNCTION AND FEATURES:

- 1. Extend machine life.
- 2. Increase the knife speed.
- Increase the working piece precision.
- 4. Reduce, even no cleaning of working piece.
- 5. Improve the environment of factory.
- Reduce the human body burns and environment pollution.
- Option with liquid switch which reflect the abnormal signal.

SPECIFICATION:

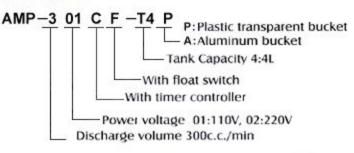

Outside Specification

SPECIFICATION TABLE:

Туре	Discharged amount / min	Float switch	Time controller	Pressure applied	Release time	Running time
AMP-301F		0	Х	1-7 kg / cm ²	PLC control	PLC control
AMP-302F	0.3-0.36 L	0	Х			
AMP-301CF		0	0		1-99 min	1-99 sec
AMP-302CF		0	0			

Fitting Parts: Metal vlexible hose Spray gun



SPECIFICATION TABLE:

Туре	Material quality	Lenght mm	
LMV-2-200L	Metal vlexible hose	200	
LMV-2-300L	Metal vlexible hose	300	
LMV-3-200L	Revertex hose	200	
LMV-3-300L	Revertex hose	300	