



Injector Connector Tube

Permits application of combined discharge of two or more Series SL-V, SL-1, SL-41 or SL-44 injectors through one feed line. Used where bearing size is such that multiple injector output is required. Fittings 1/8" NPT male each end. Carbon steel construction.

| Model | For Injector Series | Connections |
|-------|-----------------------|----------------|
| 81646 | SL-V, SL1, SL41, SL44 | 1/8" NPTF Male |



Injector Outlet Adapter

Converts individual injector lubricant outlet when standard 1/8" O.D. tube is not desired. All adapters are carbon steel unless otherwise noted.

| Model | For Injector Series | Outlet Connections |
|--------|------------------------|--------------------|
| 14988 | SL32, SL33, SL42, SL43 | 1/8" NPTF Female |
| 84200 | | 1/4" O.D. Tube |
| 14991 | | 1/8" NPTF Male |
| 249281 | | 4 mm Tube |
| 249282 | | 6 mm Tube |

Manual Grease Fitting Adapter

Allows manual lubrication of the machine between normal system cycles. Carbon steel with Nitrile seals.

| Model | For Injector Series | Outlet Connections |
|-------|------------------------|--------------------|
| 84195 | SL32, SL33, SL42, SL43 | 1/8" O.D. Tube |
| 84203 | | 1/4" O.D. Tube |



Injector Locking Cap

Carbon steel locking caps set injectors to fixed output.

| Model | For Injector Series | Fixed Volume Output |
|--------|---------------------|--------------------------------|
| 102781 | SL32, SL43 | .002 in ³ / .033 cc |
| | SL33, SL42 | .003 in ³ / .049 cc |




Injector Cover Caps


Injector cover caps are designed to protect the injector from dirt, harmful liquids and fumes.

| Model | Fits Injector Series | Covers | Material | Length | | Diameter | |
|--------|------------------------|-------------------|---------------|--------|-----------|----------|------|
| | | | | in | mm | in | mm |
| 273088 | SL-V | Indicator Stem | Polycarbonate | 1.5 | 38.1 | .715(ID) | 18.2 |
| 273089 | SL-V XL | | | 2.2 | 55.9 | .715(ID) | 18.2 |
| 83272 | SL1, SL44 | | Vinyl | 1.5 | 38.1 | .69(ID) | 17.5 |
| 83730 | SL11 | 2.0 | | 50.8 | 1.125(ID) | 28.6 | |
| 68483 | SL32, SL33, SL42, SL43 | Measuring Chamber | Aluminum | 1.25 | 31.2 | .5(ID) | 12.7 |
| 90537 | SL1, SL41, SL44 | Injector Body | | 3.25 | 82.6 | 1.19(ID) | 30.2 |





Style 1




Style 2

Closure Plugs for Injectors and Manifolds

For use in plugging lubricant outlets of injectors and manifolds.

| Model | Material | Thread Size (in) | A in. / mm | B in. / mm | Style |
|----------|-----------------|------------------|--------------|---------------|-------|
| 12698* | Carbon Steel | 3/16" -24 | 3/16" / 7.9 | 1/2" / 12.7 | 1 |
| 12698-9* | Stainless Steel | | | | |
| 12511 | Carbon Steel | 1/8" PTF | 3/16" / 11.1 | 3/16" / 11.1 | 2 |
| 12511-9 | Stainless Steel | | | | |
| 67044 | Carbon Steel | 3/8" NPT | 3/16" / 11.1 | 13/16" / 20.6 | 2 |
| 67007 | | 1/4" NPT | | | |
| 67007-9 | | | | | |

* For plugging outlet of series SL-32, SL-33, SL-42, SL-43 injectors.

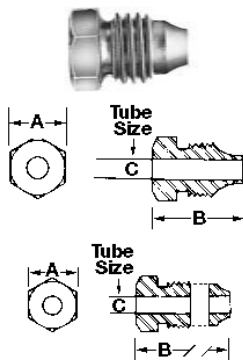

Compression Nuts

| Model | Style | Material | Thread Size (in) | A in. / mm | B in. / mm | C in. / mm |
|---------|-----------|-----------------|------------------|--------------|-------------|------------|
| 66260 | One Piece | Brass | 3/16" -24 | 3/16" / 7.9 | 1/2" / 12.7 | 1/8" / 3.2 |
| 66260-9 | | Stainless Steel | | | | |
| 83924 | Two Piece | Brass | | | | |
| 83924-9 | | Stainless Steel | | | | |
| 66713 | One Piece | Brass | 3/16" -24 | 3/16" / 11.1 | 5/8" / 15.9 | 1/4" / 6.3 |



Injector-Operated Air Valve

| Model | For Injector Series | Air Inlet | Air Outlet |
|-------|---------------------|--------------|--------------|
| 82272 | SL-1, SL-44 | 1/8" NPTF(F) | 1/8" NPTF(F) |



Air Lubricant Spray Devices

| Model | Use With Series | Air Inlet (in) | Lubricant Inlet (in) | Spray Outlet | Air Consumption | | |
|--------|------------------------|------------------|----------------------|----------------|---------------------|-----------|-----------|
| 68421 | SL1, SL44 | 1/4" NPTF Female | 1/4" NPTF Female | Fixed Nozzle | 3.5 CFM | 4.1 CFM | 5.2 CFM |
| 69456 | | | | Swivel Nozzle | @40 PSI | @60 PSI | @80 PSI |
| 68587* | | | | Bulkhead Mount | 99 l/min | 116 l/min | 147 l/min |
| 84204 | SL32, SL33, SL42, SL43 | 1/4" NPTF Female | 3/16" - 24 Male | Fixed Nozzle | Throttle Controlled | | |

* 3/16" (4.8 mm) maximum bulkhead thickness.

Metric Outlet Adapters

Adapts injector outlet to 4 or 6 mm tubing.

| Conversion Kit Model No. | Tubing Size | Material | Nut | Ferrule |
|--------------------------|-------------|--------------|--------|---------|
| 249281 | 4 mm | Carbon Steel | 249277 | 249271 |
| 249282 | 6 mm | Carbon Steel | 249274 | 249273 |

Assembly comes with one nut and one ferrule.



Model 68874

Feedline Brush

Use to apply lubricant to chains and conveyors. 1/8" NPT(F) inlet, 1" long, 5/8" surface area diameter; aluminum body with nylon bristles.